

LEVELLING FEET

SET UP MACHINES SAFELY, STABLY AND VIBRATION-FREE



Our partner **Martin Levelling** has specialised in hygienic and robust machine and adjustable feet. The products are characterised by **innovative design** and a **very high quality standard**. Thanks to the extensive range with many possible variations, the levelling feet are used in all industrial sectors. We, the Movet team, are the official German representative of Martin Levelling.

Thanks to our extensive central warehouse in the Stuttgart area, we can also deliver the products you order at short notice. All the machine feet listed in this product group are offered mounted, i.e. spindle and base plate are connected to each other. Customised products or special materials are available on request. Please see **p. 22** for all options.

VISIT US ONLINE
WWW.MOVET.DE



HIGH QUALITY SOLUTIONS FOR A WIDE RANGE OF INDUSTRIES



HYGIENE AND FOOD TECHNOLOGY



BULK SOLIDS TECHNOLOGY



UNIT LOAD CONVEYORS



STEEL CONSTRUCTION

CONTENTS

04

STAINLESS STEEL FEET

- Hygienic feet **Teknoclean** 6
- Hygienic feet **Teknohygienic** 8
- 3-A certified **accessories** 10

18

STAMPED STEEL FEET

20

ANTI-VIBRATION FEET

22

MATERIALS AND CUSTOM SOLUTIONS

13

PLASTIC FEET

16

STEEL FEET

THIS IS **NEW**



p. 5

Solid stainless steel welding plate



p. 10

Hygienic extension for 3-A feet



p. 10

Hygienic screw with **low head**



p. 11

Hygienic washer



p. 12

IP68 **terminal box** for load cells





p. 19

Stamped feet **without holes**

STAINLESS STEEL FEET

Stainless steel levelling feet are ideal for industries that require rust-free and hygienic solutions, making them perfect for hygiene and food technology. Stainless steel feet offer reliability and durability. They are corrosion-resistant and particularly hard-wearing.


- ✓ **Material:** AISI 304 (1.4301) | **Optional:** AISI 303 (1.4305) or AISI 316L (1.4401)
- ✓ With vulcanised, vibration-damping anti-slip (NBR black or EPDM blue)
- ✓ Suitable for loads from 10,000 - 60,000 N
- ✓ Levelling angle up to 30°
- ✓ Optionally with mounting lug or holes for optimum stability

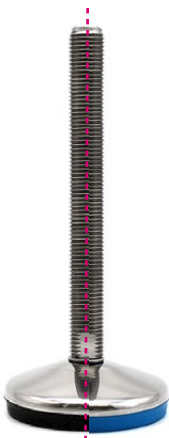

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408024025	45825000/12	M12 x 75	80	110	10.000
4061408024834	45825002/12	M12 x 100	80	135	10.000
4061408020478	45825022	M16 x 100	80	135	10.000
4061408069040	45825026	M16 x 150	80	185	10.000
4061408119769	45825026/EB*	M16 x 150	80	185	10.000
4061408119868	45825106/EB*	M16 x 150	100	189,5	15.000
4061408008773	45825128	M20 x 175	100	218	15.000
4061408014545	45825158	M24 x 200	100	243	15.000
4061408014569	45825160	M24 x 225	100	269	15.000
4061408073948	45825290	M24 x 250	120	297	30.000
4061408073955	45825292	M30 x 100	120	149	30.000
4061408073993	45825300	M30 x 200	120	249	30.000
4061408118557	45825318	M20 x 75	150	123	30.000
4061408118694	45825340	M24 x 175	150	224	40.000
4061408118793	45825366	M36 x 250	150	300	40.000

VULCANIZED stainless steel foot with anti-slip in NBR black or EPDM blue

- Further dimensions online at movet.de
- Also available as **galvanised** version
- *EB = with anti-slip in **EPDM blue**




VULCANIZED stainless steel foot with mounting lug and anti-slip in NBR black or EPDM blue

Suitable **hygiene nuts** can be found on p. 10

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408113552	45824900/10/F	M10 x 50	80	85	10.000
4061408074655	45825004/10/F	M10 x 125	80	160	10.000
4061408031986	45825024/F	M16 x 125	80	160	10.000
4061408069033	45825026/F/EB*	M16 x 150	80	185	10.000
4061408033409	45825048/F	M20 x 175	80	213	10.000
4061408027927	45825130/F	M20 x 200	100	243	15.000
4061408043798	45825160/F	M24 x 225	100	269	15.000
4061408028139	45825162/F	M24 x 250	100	294	15.000
4061408081653	45825184/F	M30 x 150	100	194	15.000
4061408036592	45825202/F	M30 x 250	100	294	15.000
4061408141081	45825250/F	M16 x 75	120	122	30.000
4061408141142	45825262/F	M20 x 75	120	122	30.000
4061408141227	45825278/F	M24 x 100	120	149	30.000
4061408141296	45825292/F	M30 x 100	120	149	30.000

- Further dimensions online at movet.de
- Also available as **galvanised** version
- *EB = with anti-slip in **EPDM blue**


Stainless steel levelling feet for **high loads** in mechanical and plant engineering



Solid stainless steel foot with anti-slip

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408021864	45810515	M16 x 50	80	89	30.000
4061408035281	45810517	M16 x 75	80	114	30.000
4061408013616	45810519	M16 x 100	80	139	30.000
4061408013630	45810523	M16 x 150	80	186	30.000
4061408016679	45810537	M20 x 175	80	214	30.000
4061408034666	45810539	M20 x 200	80	239	30.000
4061408039821	45810541	M20 x 225	80	264	30.000
4061408040032	45810581	M24 x 100	100	147	55.000
4061408040094	45810585	M24 x 150	100	202	55.000
4061408040155	45810593	M24 x 250	100	297	55.000

- Further dimensions online at movet.de
- Also available as **galvanised** version

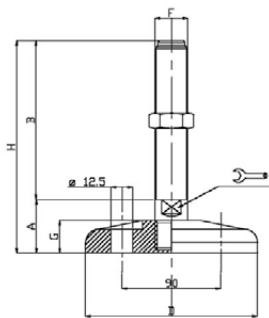


Solid stainless steel heavy duty foot with mounting holes

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408018451	45812132	M16 x 100	100	133	35.000
4061408018468	45812136	M16 x 150	100	183	35.000
4061408018482	45812188	M20 x 100	100	133	40.000
4061408018505	45812196	M20 x 200	100	233	40.000
4061408117994	45812252	M24 x 200	100	234	45.000
4061408025282	45812416	M24 x 150	120	186	50.000
4061408025275	45812420	M24 x 200	120	231	50.000
4061408118007	45812412/30	M30 x 100	120	136	50.000
4061408027347	45812420/30	M30 x 200	120	236	60.000
4061408118014	45812424/30	M30 x 250	120	286	60.000

- Further dimensions online at movet.de
- Also available as **galvanised** version
- Also available with **anti-slip**


Accessories: VA weld-on plates AISI 304 (1.4301)

NEW




NEW

ORDER NO.	TYPE	F	Q	H
4061408149612	458PI17522	M20	60 x 60	10
4061408149629	458PI17523	M24	60 x 60	10
4061408149636	458PI17542	M24	80 x 80	15
4061408149889	458PI17543	M30	80 x 80	15



ORDER NO.	TYPE	F	L	L1	S
4061408106462	458PI17489	M12	35	35	3
4061408106493	458PI17529	M12	60	40	3
4061408106509	458PI17539	M12	80	40	3
4061408106523	458PI17559	M12	100	50	3
4061408071333	458PI17500	M16	40	40	3
4061408074075	458PI17521	M20	60	60	3

- Further dimensions online at movet.de



ORDER NO.	TYPE	F	L	S
4061408074167	458PI17570	M16	42	3
4061408074181	458PI17580	M16	48	3
4061408074174	458PI17571	M20	42	3
4061408074198	458PI17581	M20	48	3


- Further dimensions online at movet.de

Stainless steel weld-on plates for levelling feet

HYGIENIC FEET | TEKNOCLEAN

The Teknoclean line is ideal for machines and systems in hygiene and food technology. The covered thread increases the ease of cleaning. The line also offers robust and durable components for demanding operating conditions.



- ✓ **Material:** AISI 304 (1.4301) | **Optional:** AISI 303 (1.4305) or AISI 316L (1.4401)
- ✓ Available with vulcanised, vibration-damping anti-slip (NBR black or EPDM blue)
- ✓ Food-safe seals at the top and bottom of the threaded cover
- ✓ **HYGIENIC DESIGN** certified according to USDA
- ✓ Secure connection between spindle and base
- ✓ Special design with adjustable thread cover sleeve

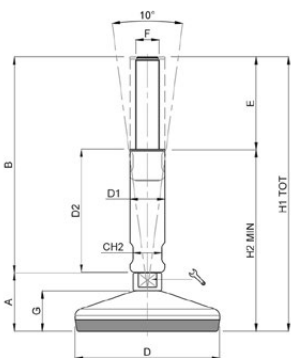

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408014484	45827000	M16 x 125	80	163	10.000
4061408014354	45827002	M16 x 150	80	188	10.000
4061408098378	45827006	M20 x 200	80	238	10.000
4061408014743	45827020	M16 x 150	100	193	15.000
4061408014910	45827024	M20 x 150	100	194	15.000
4061408098385	45827028	M20 x 200	100	244	15.000
4061408074778	45827030	M16 x 150	120	197	30.000
4061408074808	45827036	M30 x 150	120	199	30.000
4061408098408	45827038	M20 x 200	120	247	30.000
4061408098415	45827040	M24 x 200	120	249	30.000

- Further dimensions online at movet.de
- Certified according to **USDA**

TEKNOCLEAN hygiene foot with vulcanised anti-slip plate

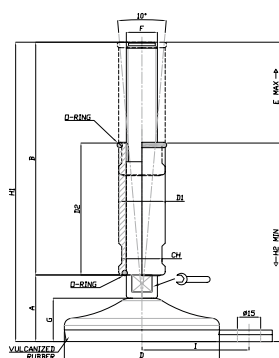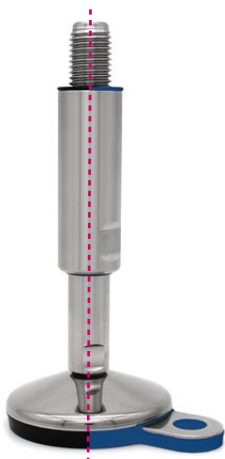

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408030002	45827000/F	M16 x 125	80	163	10.000
4061408025336	45827002/F	M16 x 150	80	188	10.000
4061408102082	45827006/F	M16 x 200	80	238	10.000
4061408037728	45827020/F	M16 x 150	100	193	15.000
4061408036622	45827022/F	M20 x 150	100	193	15.000
4061408037193	45827024/F	M24 x 150	100	194	15.000
4061408037735	45827026/F	M30 x 150	100	194	15.000
4061408102099	45827027/F	M20 x 200	100	243	15.000
4061408102105	45827028/F	M24 x 200	100	244	15.000
4061408102112	45827029/F	M30 x 200	100	244	15.000


- Further dimensions online at movet.de
- Certified according to **USDA**

TEKNOCLEAN hygiene foot with vulcanised anti-slip and mounting lug



Suitable **hygiene nuts** can be found on p. 10


For the hygiene and food industry

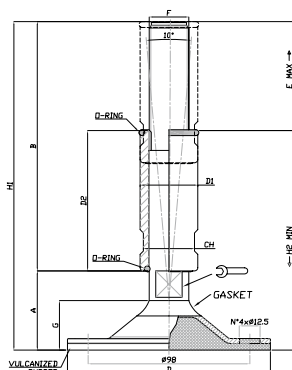

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408030255	45815800/V	M16 x 125	85	156	12.000
4061408037155	45815802/V	M16 x 150	85	181	12.000
4061408037162	45815804/V	M20 x 150	85	181	12.000
4061408094356	45815805/V	M20 x 200	85	231	12.000
4061408030262	45815806/V	M24 x 200	123	186	20.000
4061408037384	45815808/V	M20 x 150	123	186	20.000
4061408027989	45815810/V	M24 x 150	123	186	20.000
4061408034017	45815812/V	M30 x 150	123	186	20.000
4061408094370	45815813/V	M20 x 200	123	236	20.000
4061408094363	45815815/V	M24 x 200	123	236	20.000

- Further dimensions online at movet.de
- Certified according to **USDA**


TEKNOCLEAN hygienic foot with stainless steel base plate, stainless steel spindle, floor fixation and rubber seal



ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408012350	45816000	3/4G	100	120	70.000
4061408018413	45816002	3/4G	120	120	98.000
4061408018420	45816004	1" 1/4G	100	151	100.000
4061408018437	45816006	1" 1/4G	120	156	150.000
4061408018444	45816008	1" 1/4G	160	156	200.000

- Further dimensions online at movet.de
- Certified according to **USDA**
- Also available with **anti-slip**

TEKNOTANK spherical base made of stainless steel with hygienic sleeve



TEKNOCLEAN SPINDLE FOR WHEEL



Properties:	Stainless steel AISI 304 shaft with blue EPDM seal, for swivel castors with hole or with threaded pin; Certified according to USDA, Attention: Swivel castor not included
Thread-Ø:	M12, M16, M20, M24, M30
Optional:	Fine thread Unc & Fnc thread Black NBR seal AISI 316 (1.4401)

OPTIONAL: SUPPORT PLATES FOR THE SPINDLE FOR SWIVEL CASTORS


ORDER NO.	Type	DESIGNATION
4061408127863	458ROND SUPD60	Support plate Ø 60 mm, suitable for M12
4061408127900	458ROND SUPD80	Support plate Ø 80 mm, suitable for M12

HYGIENIC FEET

TEKNOHYGIENIC

The Tekno-Hygienic & 3-A line offers levelling feet and accessories for the highest hygiene standards in demanding environments, ideal for the food, dairy, chemical, pharmaceutical and cosmetics industries. The Teknohygienic feet ensure safety and hygiene in sensitive production areas.


- ✓ **Material:** AISI 304 (1.4301)
- ✓ Special design with fully sealed and adjustable thread cover sleeve
- ✓ Hygienically tight thanks to blue silicone gasket between spindle and base plate
- ✓ Surface roughness < Ra 0.8 µm thanks to high-gloss polish
- ✓ Water-draining surfaces according to 3-A
- ✓ With anti-slip in NBR black or EPDM blue

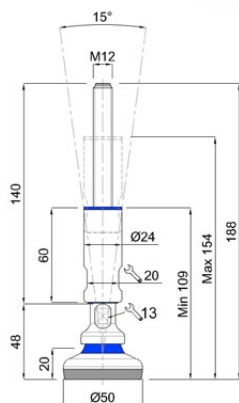

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408034680	45827100/3A	M12 x 140	50	188	5.000
4061408107971	45827140/3A	M16 x 140	80	193	20.000
4061408110162	45827150/3A	M24 x 140	80	193	20.000
4061408110186	45827162/3A	M16 x 190	100	246	25.000
4061408110247	45827174/3A	M30 x 185	100	241	25.000
4061408110353	45827202/3A	M36 x 235	120	295	30.000
4061408109852	45827210/3A	M20 x 140	150	203	35.000
4061408110445	45827228/3A	M36 x 235	150	298	35.000

- Further dimensions online at movet.de
- Certified according to 3-A

TEKNOHYGIENIC Hygienic foot with anti-slip in NBR black or EPDM blue

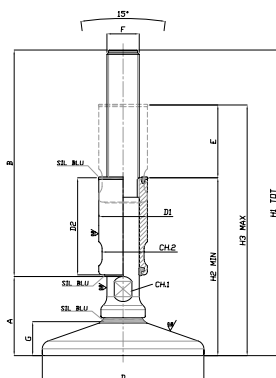


ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408109944	45827320/3A	M12 x 140	60	185	25.000
4061408110650	45827326/3A	M16 x 190	60	235	40.000
4061408110803	45827344/3A	M20 x 140	80	187	45.000
4061408109968	45827360/3A	M16 x 140	100	189	40.000
4061408111022	45827374/3A	M30 x 185	100	234	60.000
4061408110001	45827380/3A	M16 x 140	120	191	40.000
4061408110735	45827392/3A	M30 x 135	120	186	80.000
4061408110797	45827402/3A	M36 x 235	120	286	80.000
4061408110827	45827412/3A	M20 x 190	150	244	45.000
4061408110933	45827426/3A	M36 x 185	150	239	80.000

- Further dimensions online at movet.de
- Certified according to 3-A

TEKNOHYGIENIC Hygienic foot


Water-draining surfaces increase ease of cleaning

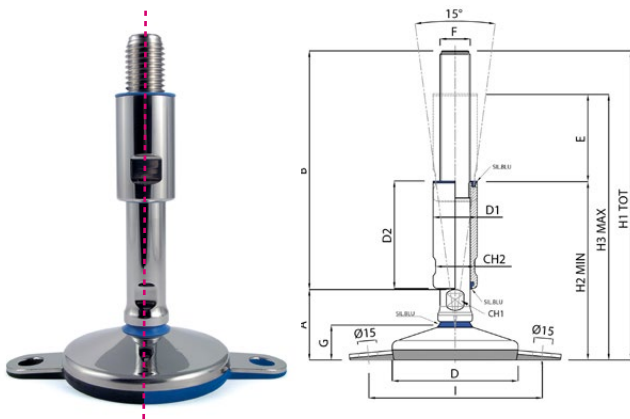

TEKNOHYGIENIC Hygienic foot with two mounting lugs and anti-slip in NBR black or EPDM blue

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408145539	45827176FF/3A	M12 x 140	120	200	10.000
4061408145553	45827180FF/3A	M16 x 140	120	200	30.000
4061408145577	45827184FF/3A	M20 x 140	120	200	30.000
4061408145591	45827188FF/3A	M24 x 140	120	200	30.000
4061408145614	45827192FF/3A	M30 x 135	120	195	30.000
4061408145621	45827194FF/3A	M30 x 185	120	245	30.000
4061408145645	45827198FF/3A	M36 x 135	120	195	30.000
4061408145669	45827202FF/3A	M36 x 235	120	295	30.000


- Further dimensions online at movet.de
- Certified according to 3-A
- Hygienic **accessories** can be found on p. 10

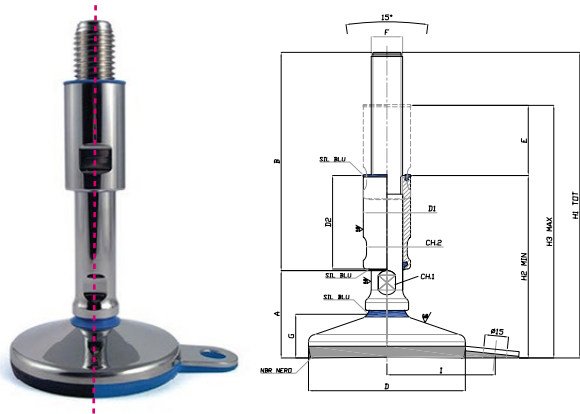

TEKNOHYGIENIC Hygienic foot with one mounting lug and anti-slip in NBR black or EPDM blue

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408109975	45827120F/3A	M12 x 140	60	191	10.000
4061408110490	45827130F/3A	M20 x 190	60	241	10.000
4061408109982	45827140F/3A	M16 x 140	80	193	20.000
4061408110520	45827146F/3A	M20 x 142	80	195	20.000
4061408110544	45827150F/3A	M24 x 140	80	193	20.000
4061408110551	45827152F/3A	M24 x 190	80	243	20.000
4061408109999	45827160F/3A	M16 x 140	100	196	25.000
4061408110582	45827166F/3A	M20 x 190	100	246	25.000
4061408110605	45827170F/3A	M24 x 190	100	246	25.000
4061408110629	45827174F/3A	M30 x 185	100	241	25.000
4061408145393	45827176F/3A	M12 x 140	120	200	10.000
4061408145522	45827202F/3A	M36 x 235	120	295	30.000


- Further dimensions online at movet.de
- Certified according to 3-A
- Hygienic **accessories** can be found on p. 10

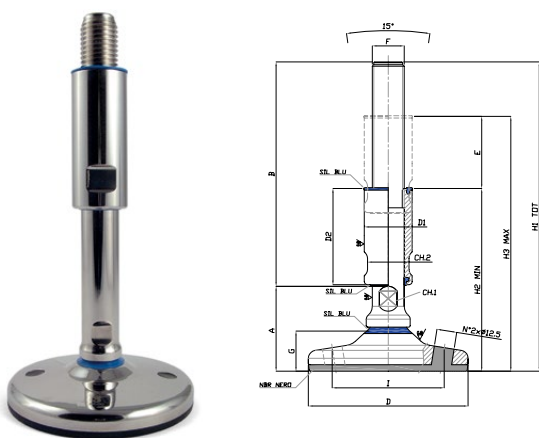

TEKNOHYGIENIC Hygienic foot with mounting holes and anti-slip in NBR black or EPDM blue


ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408110070	45827361F/3A	M16 x 140	100	193	40.000
4061408111312	45827367F/3A	M20 x 190	100	243	45.000
4061408111350	45827375F/3A	M30 x 185	100	238	60.000
4061408110087	45827381F/3A	M16 x 140	120	195	40.000
4061408111411	45827393F/3A	M30 x 135	120	190	80.000
4061408111466	45827403F/3A	M36 x 235	120	290	80.000
4061408110100	45827411F/3A	M20 x 140	150	199	45.000
4061408111510	45827421F/3A	M30 x 185	150	244	80.000
4061408111558	45827429F/3A	M36 x 235	150	294	80.000
4061408140664	45827451F/3A	M20 x 140	200	197	45.000
4061408140701	45827459F/3A	M30 x 135	200	192	80.000
4061408140763	45827469F/3A	M36 x 235	200	292	80.000

- Further dimensions online at movet.de
- Certified according to 3-A
- Hygienic **accessories** can be found on p. 10




3-A HYGIENIC ADAPTER

Properties:	Screw-on flange with stainless steel plate for installation with screws or by welding, certified for the food industry, stainless steel AISI 304, blue or white LDPE tailpipe
Dimensions (mm):	98 x 98 x 10
Optional:	Without holes for assembly by welding




3-A HYGIENIC EXTENSIONS

Properties:	For thread extension, made of polished stainless steel, with blue silicone gasket, certified for the food industry
Thread-Ø:	M12, M16, M20, M24, M30
Bore-Ø:	12, 16, 20, 24, 30
Optional:	Available as USDA version with black NBR seal



3-A THREAD COVER


Properties:	Polished or brushed stainless steel, double sealing of the thread, special seal on the spindle joint, making it particularly easy to clean.
Thread-Ø:	M12, M16, M20, M24, M30
Optional:	Fine thread Unc & Fnc thread Black NBR seal AISI 316 (1.4401)



HYGIENIC LOW-PROFILE SCREW


Properties:	Stainless steel AISI 316 (1.4401), highly polished hygienic screw with low head, blue silicone gasket, 3-A and IP69K certified
Thread-Ø:	M4, M5, M6, M8

NEW




3-A HYGIENIC SCREW

Properties:	AISI 304 (1.4301) stainless steel, highly polished top-hat screw, blue silicone gasket, 3A approved
Thread-Ø:	M5, M6, M8, M10, M12, M16, M20



3-A HYGIENIC NUT

Properties:	Stainless steel AISI 304 (1.4301), highly polished cap nut, blue silicone gasket, 3A approved
Thread-Ø:	M3, M4, M5, M6, M8, M10, M12, M14, M16, M20, M24
Optional:	Stainless steel AISI 316 (1.4401), fine thread, Unc & Fnc thread, black NBR seal




3-A U-HANDLES & STAR KNOBS

Properties: AISI 304 stainless steel, with threaded holes, blue silicone seals, 3-A approved

Größen:

- U-Handle: L = 98/110/130/190 mm
- Star knob: D = 27/33/40/50/65 mm




3-A STAINLESS STEEL TURN LATCHES 90° WITH HANDLE



Properties: Stainless steel AISI 304 1/4 turn, with L- or T-handle, hygienic design, IP69K, blue silicone gasket, 3-A approved

Thickness (H): 18, 20, 22, 24, 26, 28 mm

Optional: Stainless steel AISI 316 (1.4401)




3-A STAINLESS STEEL ADJUSTABLE TURN LATCH 90°

Properties: Stainless steel AISI 304 (1.4301), 1/4 turn, with hexagon insert, IP67, bore D.14+0.2, blue silicone seal, 3-A approved

Ø (mm): 20

Optional: Stainless steel AISI 316 (1.4401)
Blue silicone seal
Other variants and matching keys can be found in the shop




3-A HYGIENIC WASHER

NEW

Properties: Stainless steel reinforced washers made of blue, vulcanised EPDM

Dimensions (mm): Outside (DE) x Inside (DI) x Height (SP): 10 x 4 x 1,5 | 10 x 5 x 1,5 | 15 x 6 x 2 | 20 x 8 x 2



3-A SILICONE GASKET IN BLUE OR BLACK

Properties: Silicone seals, certified for the food industry

Ø (mm): 14,5 x 7,5 | 18,5 x 10,5 | 24 x 18 | 30 x 23 | 35 x 27 | 42 x 33,5 | 50 x 40,5 | 22 x 16 | 26 x 20 | 30 x 24 | 36 x 30 | 42 x 36

Optional:


- EPDM and NBR seals
- other colours

Would you like a consultation? Simply give us a call or write to us. We are happy to help you.

T +49 7181 - 980 32 00

E info@movet.de

3-A loading cell & hygienic feet | Precise weighing in the process

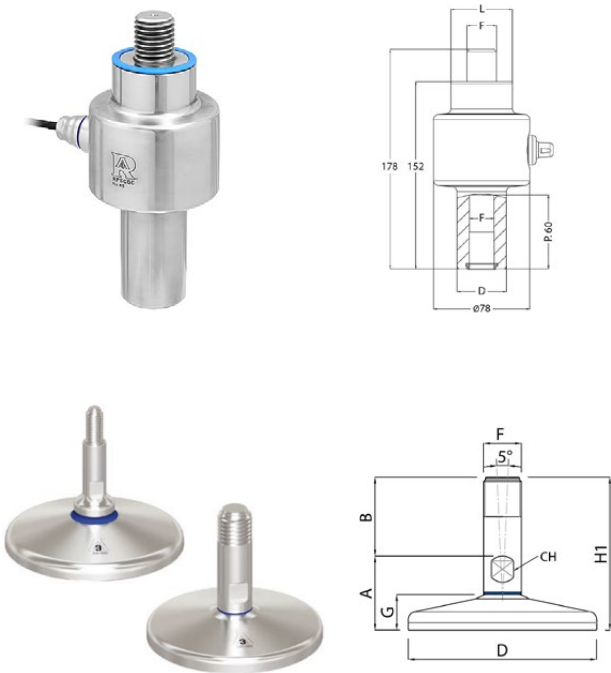

3-A COMPRESSION LOADING CELL

by **LAUMAS®**

Properties:	Stainless steel 17-4 PH, fully disinfectable, easy to install, cable suitable for contact with food, lower shaft with internal thread for height adjustment, available individually or as a set with hygienic foot (see below), 3-A certified, IP69K tested;
Thread-Ø:	M12, M16, M20, M24, M30, M36
Nominal load:	1,000 - 20,000 kg
Optional:	Can also be mounted on all other MARTIN feet for applications that do not require 3-A certification;

HYGIENIC FEET FOR LOADING CELL

Properties:	Partial thread for connection to the load cell, inclination angle 5°C, rated load up to 20,000 kg, 3-A certified;
Thread-Ø:	M12, M16, M20, M24, M30, M36


Terminal box IP68 for 3-A loading cells

by **LAUMAS®**



PROPERTIES


Material:	Stainless steel AISI 304
Dimensions:	143,4 x 92 mm
Operating temp.:	-20 °C to +60 °C
Connection:	Up to 4 load cells (4/6 wires)
Protection class:	IP68
Mounting:	Two M5 hygiene screws (included in the scope of delivery)

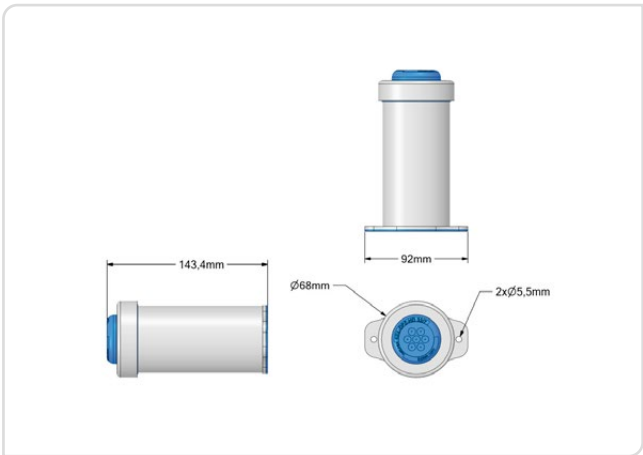

PLASTIC FEET

The plastic feet are made of glass fibre-reinforced polyamide as well as frost-proof, UV-resistant and ESD-protected polyamide. They are used in automation, conveyor systems, the packaging industry, work tables and aluminium structures.


- ✓ **Spindle material:** AISI 304 (1.4301) or galvanised steel
- ✓ **Base plate material:** polyamide in black or blue
- ✓ Suitable for loads from 15,000 - 45,000 N
- ✓ Levelling angle up to 30°
- ✓ With mounting holes Ø 12.5 mm (knockout)
- ✓ Optionally with vibration-damping anti-slip (NBR black)

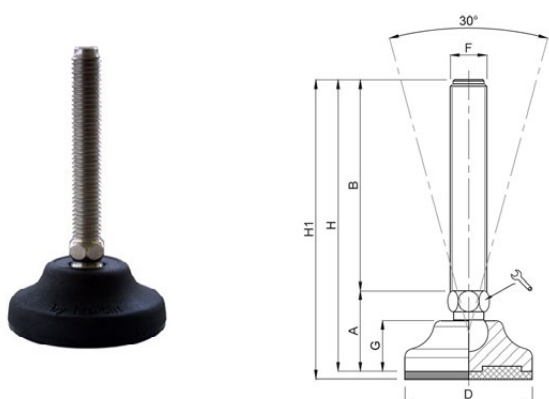

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408015702	45810060	M16 x 50	65	90	15.000
4061408014095	45810062	M16 x 75	65	115	15.000
4061408009725	45810082	M16 x 150	83	194	20.000
4061408011131	45810084	M16 x 175	83	219	20.000
4061408012992	45810090	M20 x 100	83	144	20.000
4061408102860	45810126	M20 x 150	103	204	25.000
4061408016419	45810148	M24 x 200	103	254	25.000
4061408015023	45810162	M16 x 150	123	210	35.000
4061408011643	45810174	M20 x 100	123	160	35.000
4061408016730	45810182	M20 x 200	123	285	35.000

- Further dimensions online at movet.de
- Also available as **galvanised** version

Plastic foot, VA spindle with 30° levelling angle

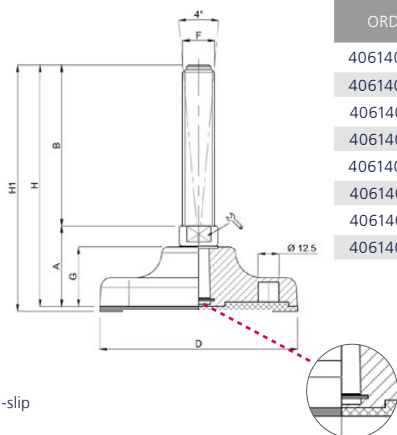


ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408084524	45812658	M16 x 50	83	90	20.000
4061408035236	45812722	M16 x 100	103	145	35.000
4061408011056	45812666	M16 x 150	83	190	20.000
4061408010196	45812692	M20 x 125	83	165	20.000
4061408086474	45812752	M20 x 75	103	120	35.000
4061408105182	45812696	M20 x 175	83	218	20.000
4061408010417	45812796	M24 x 225	103	272	35.000
4061408019755	45812918	M30 x 200	123	250	45.000

- Further dimensions online at movet.de
- Also available as **galvanised** version

Plastic foot, VA spindle, optionally with anti-slip

High **load capacity** thanks to extended spindle end


Polyamide levelling feet for high loads - ideal for technical applications

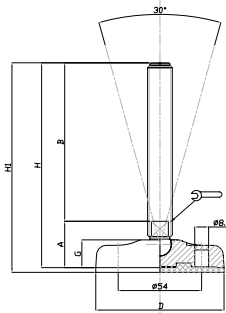

ECO Plastic foot, VA spindle - extra flat base plate with 30° levelling angle

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408099917	45818500	M10 x 50	83	83	10.000
4061408099948	45818504	M10 x 100	83	133	10.000
4061408099986	45818512	M12 x 50	83	83	13.000
4061408100002	45818516	M12 x 100	83	133	13.000
4061408100026	45818520	M12 x 150	83	183	13.000
4061408100040	45818524	M16 x 100	83	133	16.000
4061408100064	45818528	M16 x 150	83	183	16.000
4061408100088	45818532	M16 x 200	83	233	16.000
4061408100125	45818540	M20 x 150	83	185	18.000
4061408100163	45818548	M20 x 250	83	285	18.000

- Further dimensions online at movet.de
- For the blue version, simply add "BL" to the type number (e.g.: 45818500BL)
- Also available as **galvanised** version


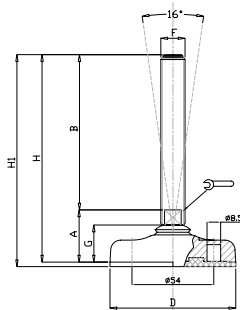


ECO Plastic foot, VA spindle - extra flat base plate with 16° spindle levelling angle

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408098163	45818222	M16 x 100	83	138	20.000
4061408098170	45818226	M16 x 150	83	188	20.000
4061408098224	45818234	M20x 100	83	140	20.000
4061408098248	45818238	M20 x 150	83	190	20.000
4061408098927	45818264	M16 x 100	103	139	30.000
4061408099009	45818280	M20 x 150	103	191	30.000
4061408099023	45818284	M20 x 200	103	241	30.000
4061408099108	45818300	M24 x 200	103	241	30.000
4061408099351	45818350	M24 x 250	123	295	35.000
4061408099412	45818362	M30 x 200	123	245	35.000

- Further dimensions online at movet.de
- For the **blue** version, simply add "BL" to the type number (e.g.: 45818222BL)
- Also available as **galvanised** version

Accessories: PA Threaded plugs




Plastic threaded plug with VA thread

ORDER NO.	TYPE	DIMENSION	BORE	TOTAL HEIGHT	LOAD CAPACITY N
4061408027842	45817041I	35 x 35	M16	43	7.000
4061408017225	45817043I	40 x 40	M10	43	8.000
4061408017232	45817046I	40 x 40	M16	43	8.000
4061408010264	45817051I	40 x 40	M16	43	8.000
4061408011834	45817052I	40 x 40	M20	43	8.000

- Further dimensions online at movet.de
- Also available as **galvanised** version
- Alternatively with **brass** internal thread



ORDER NO.	TYPE	DIMENSION	BORE	TOTAL HEIGHT	LOAD CAPACITY N
4061408014651	45817007I	Ø 38	M16	43	5.500
4061408015719	45817011I	Ø 42	M16	42	6.500
4061408017362	45817013I	Ø 48	M10	49	8.000
4061408010721	45817016I	Ø 48	M16	49	8.000
4061408083800	45817017I	Ø 38	M20	49	8.000

- Further dimensions online at movet.de
- Also available as **galvanised** version
- Alternatively with **brass** internal thread

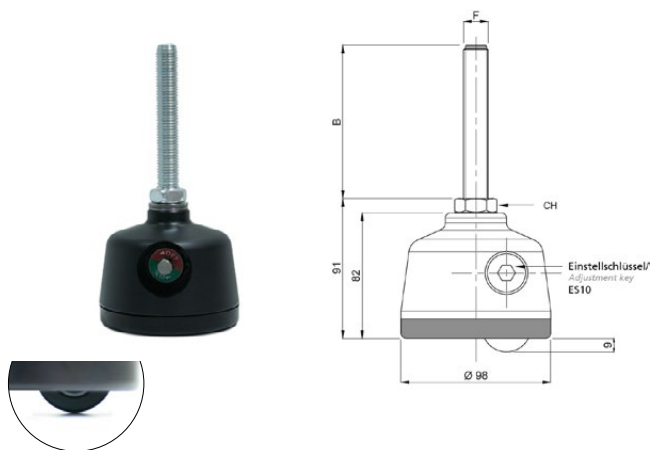


MOBILE PLASTIC FOOT WITH WHEEL

ORDER NO.	TYPE	CH	F	B	NOMINAL LOAD KG
4061408106110	45801FR2	24	M16	50	1.500
4061408106127	45802FR2	24	M16	100	1.500
4061408106134	45803FR2	24	M20	75	1.500
4061408106141	45804FR2	24	M20	125	1.500
4061408106158	45805FR2	24	M24	75	1.500
4061408106165	45806FR2	24	M24	125	1.500

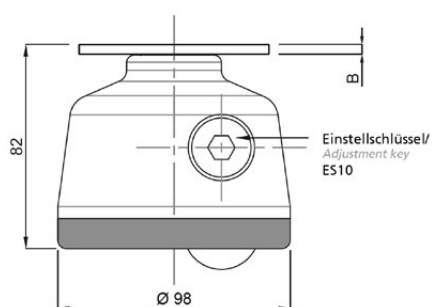
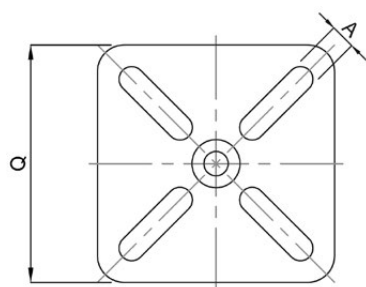


MOBILE PLASTIC FOOT WITH WHEEL AND FLANGE PLATE

ORDER NO.	TYPE	F	B	D	CH	G	A	H1	NOMINAL LOAD KG
4061408106172	458020PF80X80R2	M12	50	120	13	23	51,5	101,5	1.000

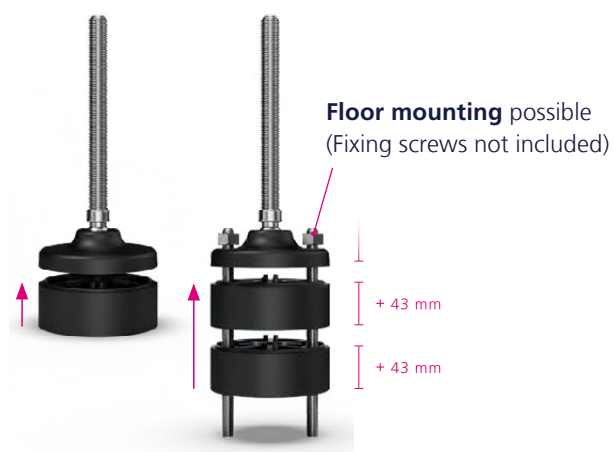

Floor mounting possible
(Fixing screws not included)

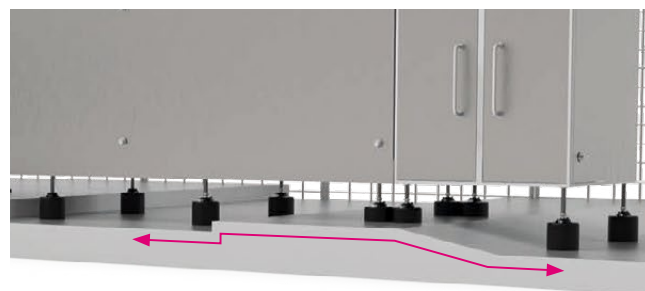

EXTENSION FOR PLASTIC FOOT PLATES WITH Ø 123

Material:	Plastic (Polyamid)
Properties:	For levelling out large differences in height and for raising machinery and equipment; Suitable for all plastic base plates with Ø 123 mm; suitable for all floor types;
Optional:	Anti-slip NBR Black (FDA-Quality)


ORDER INFORMATION

ORDER NO.	TYPE	D	I	H	G	F	LOAD CAPACITY N
4061408145355	458PROLD123	123	87	43	13	18	35.000

STEEL FEET

This line offers adjustable feet and levelling steel feet with various coatings, including painted, galvanised, burnished and phosphated. They are ideal for applications in palletisers, machine tools, the ceramics industry, automation, robotics and heavy industry.


- ✓ **Material:** Galvanised steel
- ✓ Suitable for loads from 30,000 - 90,000 N
- ✓ Levelling angle up to 30°
- ✓ With Ø 12.5 mm mounting holes for optimum stability
- ✓ Optionally with vibration-damping anti-slip (NBR black)

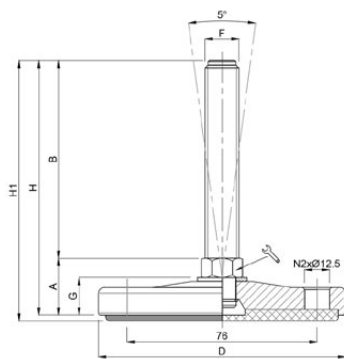

MASSIVE Steel foot with two mounting holes

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408022113	45815510	M16 x 100	100	125	30.000
4061408037407	45815514	M20 x 175	100	200	30.000
4061408023707	45815528	M24 x 150	120	175	45.000
4061408091751	45815529	M24 x 200	120	225	45.000
4061408017850	45815531	M30 x 175	120	201	45.000
4061408096480	45815533	M20 x 75	150	100	45.000
4061408096695	45815534	M20 x 125	150	150	45.000
4061408096756	45815537	M24 x 150	150	175	50.000
4061408096770	45815538	M24 x 200	150	225	50.000
4061408096794	45815539	M30 x 125	150	151	55.000

• Further dimensions online at movet.de

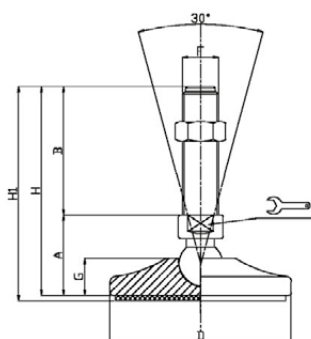

MASSIVE Steel foot, powder-coated yellow with anti-slip coating

Also available in a galvanised version




ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408041503	45810768	M16 x 125	100	171	35.000
4061408035670	45810770	M16 x 150	100	196	35.000
4061408041626	45810782	M20 x 100	100	146	45.000
4061408035663	45810784	M20 x 125	100	171	45.000
4061408041688	45810788	M20 x 175	100	221	45.000
4061408022724	45810842	M20 x 200	120	249	45.000
4061408072828	45810884	M20 x 225	120	274	45.000
4061408042784	45810846	M20 x 250	120	299	45.000
4061408042999	45810870	M30 x 150	120	200	65.000
4061408014842	45810878	M30 x 225	120	275	65.000

• Further dimensions online at movet.de

• Also available without **anti-slip**

• For the **galvanised** version, simply add "Z" to the type no. (e.g.: 45810768/Z)


Levelling feet made of galvanised steel for universal use in **heavy-duty applications**



Polished steel base with anti-slip for heavy loads

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408017799	45811515	M16 x 100	80	134	30.000
4061408013685	45811519	M16 x 150	80	184	30.000
4061408016310	45811523	M16 x 200	80	234	30.000
4061408092468	45811671	M20 x 100	100	136	40.000
4061408041848	45811675	M20 x 150	100	186	40.000
4061408092475	45811679	M20 x 200	100	236	40.000
4061408092581	45811735	M24 x 200	100	236	45.000
4061408108213	45811851	M24 x 250	120	286	50.000
4061408087198	45811899	M30 x 150	120	186	60.000
4061408087211	45811903	M30 x 200	120	236	60.000


- Further dimensions online at movet.de
- Also available without **anti-slip**

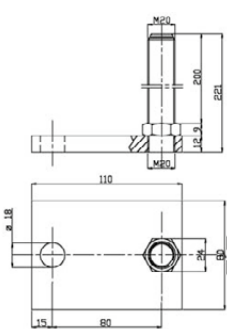

Galvanised steel foot with rectangular foot plate and fixing hole

ORDER NO.	TYPE	DESIGNATION	THREAD	TOTAL HEIGHT	LOAD CAPACITY N
4061408008537	45819000	100X60 H12	M16x150	171	30.000
4061408011407	45819001	110X80 H12	M20x200	221	40.000


- Further dimensions online at movet.de

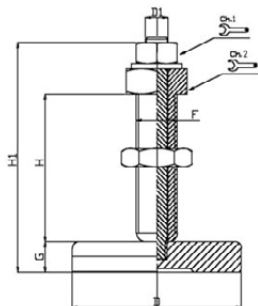

TEKNOFIX CNC Tank foot with various adjustment options

ORDER NO.	TYPE	DESIGNATION	D	D1	TOTAL HEIGHT	LOAD CAPACITY N
4061408022144	45812622	M30x2	Ø 80	Ø 16	126	70.000
4061408072668	45812627*	M27x2	Ø 68	Ø 12	134	65.000
4061408075980	45812627/90	M27x2	Ø 68	Ø 12	149	65.000
4061408076185	45812627/110	M27x2	Ø 68	Ø 12	169	65.000
4061408078400	45812627/130	M27x2	Ø 68	Ø 12	189	65.000
4061408101559	45812627/134	M27x2	Ø 68	Ø 12	193	65.000

- *Also available as a **VA** variant

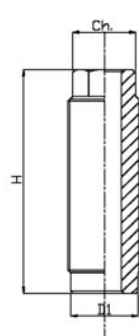

Galvanised levelling screw, with adjustment option for secure floor anchoring


ORDER NO.	TYPE	DESIGNATION	D1	TOTAL HEIGHT	LOAD CAPACITY N
4061408012312	45819100Z	M30 x 2	27	110	70.000
4061408012138	45819101Z	M36 x 2	33	110	90.000

- Also available as a **phosphated** version
- Additional **base plate** available

STAMPED STEEL FEET

Galvanised stainless steel stamped feet are a good compromise between plastic and solid feet. The variant with vulcanised rubber is also suitable for the food industry. These feet are used in the food industry, ceramics industry and for logistics machines.


- ✓ **Material spindle:** Galvanised steel or stainless steel
- ✓ Suitable for loads of 20,000 - 35,000 N
- ✓ **Flat design** for flexible areas of application
- ✓ **Material base plate:** Galvanised steel or stainless steel
- ✓ Without, with two or with four **mounting holes** Ø 12.5 mm
- ✓ Optionally with vulcanised rubber plate (NBR black)

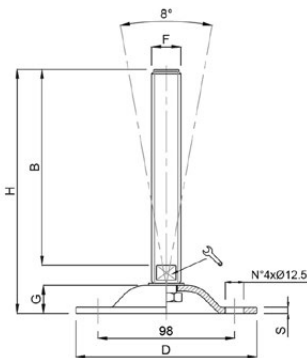

Stamped foot with four mounting holes

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408017478	45815600Z	M16 x 100	124	134	20.000
4061408080533	45815604Z	M16 x 150	124	184	20.000
4061408027323	45815608Z	M16 x 175	124	209	20.000
4061408022229	45815612Z	M20 x 100	124	134	25.000
4061408022779	45815620Z	M20 x 175	124	209	25.000
4061408082100	45815624Z	M20 x 200	124	234	25.000
4061408029754	45815632Z	M24 x 150	124	184	30.000
4061408017836	45815640Z	M30 x 150	124	185	35.000
4061408037513	45815644Z	M30 x 200	124	235	35.000
4061408021512	45815648Z	M30 x 250	124	285	35.000

- Further dimensions online at movet.de
- Also available as a **stainless steel** version
- Optionally available in **black powder-coated**
- Also available with **anti-slip**

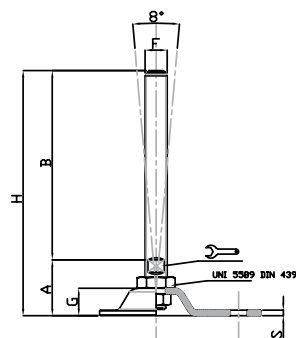


Stamped levelling foot with rectangular base and two mounting holes

ORDER NO.	TYPE	DESIGNATION	BAE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408079681	45815660Z/FIX	M16 x 150	80 x 112	189,5	20.000
4061408079766	45815662Z/FIX	M16 x 200	80 x 112	239,5	20.000
4061408079773	45815664Z/FIX	M20 x 150	80 x 112	190,5	20.000
4061408079780	45815666Z/FIX	M20 x 200	80 x 112	240,5	20.000
4061408079797	45815670Z/FIX	M16 x 150	111 x 151	191	25.000
4061408079803	45815672Z/FIX	M16 x 200	111 x 151	241	25.000
4061408079810	45815674Z/FIX	M20 x 150	111 x 151	192	25.000
4061408079827	45815678Z/FIX	M20 x 200	111 x 151	242	25.000
4061408079834	45815680Z/FIX	M24 x 150	111 x 151	193	30.000
4061408079841	45815682Z/FIX	M24 x 200	111 x 151	243	30.000

- Also available as a **stainless steel** version

Stamped levelling feet with mounting holes and **extra-flat design**

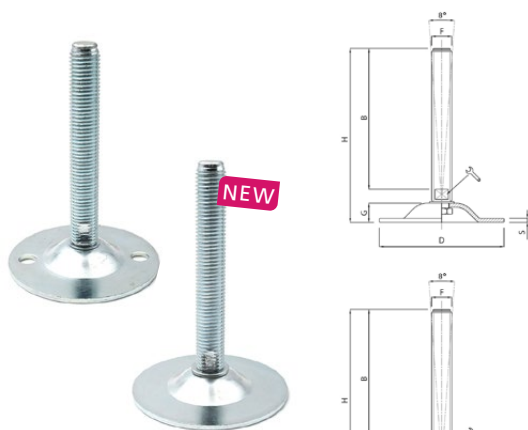

Stamped feet with or without two mounting holes


WITH TWO MOUNTING HOLES

ORDER NO.	TYPE	DESIGNATION	BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408096503	45815828	M16 x 100	85	125	15000
4061408096510	45815830	M16 x 150	85	175	15000
4061408096527	45815832	M16 x 175	85	200	15000
4061408096534	45815834	M20 x 100	85	125	15000
4061408096541	45815836	M20 x 150	85	175	15000
4061408096558	45815838	M20 x 200	85	225	15000

WITHOUT MOUNTING HOLES

ORDER NO.	TYPE	DESIGNATION	BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408149766	45815828/NF	M16 x 100	85	125	15000
4061408149773	45815830/NF	M16 x 150	85	175	15000
4061408149780	45815832/NF	M16 x 175	85	200	15000
4061408149797	45815834/NF	M20 x 100	85	125	15000
4061408149803	45815836/NF	M20 x 150	85	175	15000
4061408149810	45815838/NF	M20 x 200	85	225	15000


- Further dimensions online at movet.de
- Also available as a **stainless steel** version
- Also available with **anti-slip**

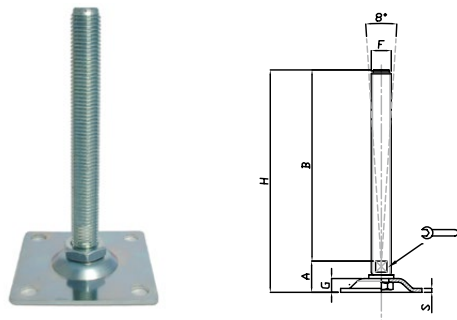

Square shaped stamped levelling foot in galvanised steel with fixing holes

ORDER NO.	TYPE	DESIGNATION	BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408096909	45815782	M16 x 150	100 x 100	179	20.000
4061408096916	45815784	M16 x 200	100 x 100	229	20.000
4061408096923	45815786	M20 x 200	100 x 100	182	25.000
4061408096930	45815788	M20 x 200	100 x 100	232	25.000
4061408096947	45815790	M24 x 150	100 x 100	182	30.000
4061408096954	45815792	M24 x 200	100 x 100	232	30.000


- Further dimensions online at movet.de
- Also available as a **stainless steel** version

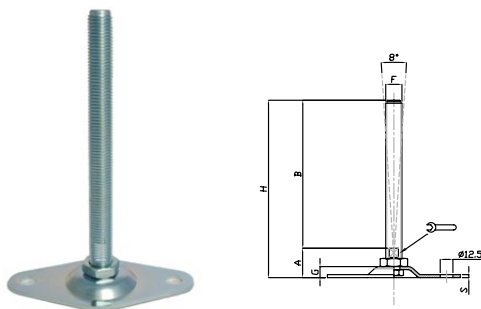

Double-drop shaped stamped levelling foot in galvanised steel with mounting holes

ORDER NO.	TYPE	DESIGNATION	BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408095766	45815768	M12 x 100	65 x 132	128	15.000
4061408095773	45815770	M12 x 150	65 x 132	178	15.000
4061408095780	45815772	M16 x 100	65 x 132	129	20.000
4061408095797	45815774	M16 x 150	65 x 132	179	20.000
4061408095803	45815776	M16 x 200	65 x 132	229	20.000
4061408095810	45815778	M20 x 150	65 x 132	182	20.000
4061408095827	45815780	M20 x 200	65 x 132	232	20.000

- Further dimensions online at movet.de
- Also available as a **stainless steel** version
- Also available with **anti-slip**

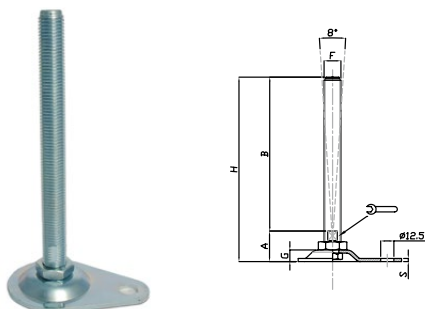

Teardrop shaped stamped levelling foot in galvanised steel with mounting holes


ORDER NO.	TYPE	DESIGNATION	BASE PLATE	TOTAL HEIGHT	LOAD CAPACITY N
4061408095735	45815760	M16 x 150	65 x 99	179	20.000
4061408095728	45815762	M16 x 200	65 x 99	229	20.000
4061408095742	45815764	M20 x 150	65 x 99	182	20.000
4061408095759	45815766	M20 x 200	65 x 99	232	20.000

- Further dimensions online at movet.de
- Also available as a **stainless steel** version
- Also available with **anti-slip**

ANTI-VIBRATION FEET


This line offers anti-vibration solutions and levelling feet that are ideal for solving vibration problems. Depending on the application, components made of plastic, steel or stainless steel are available. These products are used in injection moulding machines, machine tools, printing machines, vibrators, compressors and other areas.

- ✓ **Material spindle (adjustable):** Galvanised steel
- ✓ Suitable for static loads up to 50,000 N
- ✓ Height-adjustable support plate
- ✓ Reinforced base plate
- ✓ Vibration-damping foot element (NBR black)

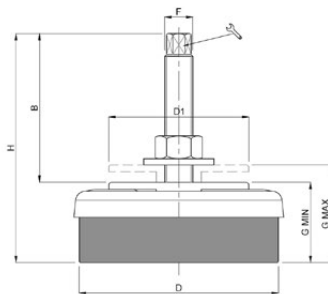

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	stat. Load capacity N dyn. Load capacity
4061408080403	45814020	M12 x 1.25	80	136	5.000 2.500
4061408080410	45814025	M16 x 1.5	120	150	10.000 5.000
4061408080427	45814030	M20 x 1.5	160	190	20.000 9.000
4061408080434	45814035	M20 x 1.5	200	207	35.000 15.000

ANTIVIBRATION Heavy-duty levelling foot with vibration damping

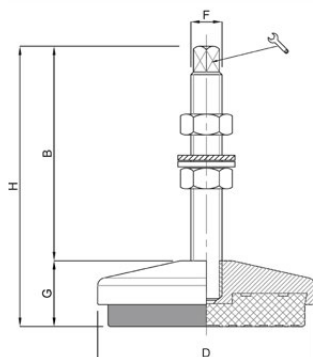


ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	stat. Load capacity N dyn. Load capacity
4061408013562	45813180V	M12 x 83	83	113	6.000 3.000
4061408013579	45813190V	M14 x 121	104	155	11.000 6.000
4061408019175	45813200V	M16 x 125	120	162	13.000 7.000
4061408022366	45813220V	M20 x 135	160	180	25.000 12.000
4061408019434	45813232V	M24 x 135	230	190	50.000 25.000

- Further dimensions online at movet.de
- Also available as **galvanised** version
- Also available as a **stainless steel** version

ANTIVIBRATION Heavy-duty levelling foot with vibration damping, powder-coated yellow


Special levelling feet with **vibration-isolating** properties

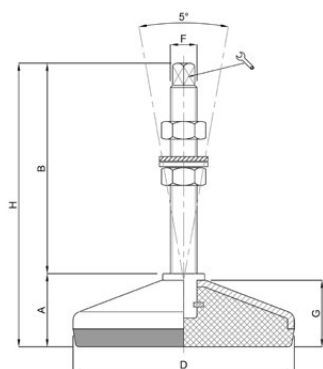

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	stat. Load capacity N dyn. Load capacity
4061408118052	45828020Z	M14 x 100	80	128	5.500 2.500
4061408118069	45828030Z	M12 x 75	100	106	9.000 5.000
4061408029969	45828050Z	M16 x 125	100	156	9.000 5.000
4061408074556	45828060Z	M16 x 125	120	160	11.000 6.000
4061408074594	45828080Z	M24 x 125	120	160	11.000 6.000


- Further dimensions online at movet.de
- Also available as a **stainless steel** version

Anti vibration levelling foot with vulcanized rubber (NBR 80 shore)

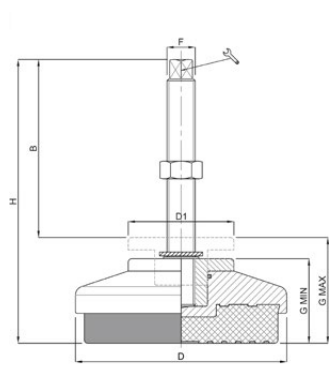

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	stat. Load capacity N dyn. Load capacity
4061408022168	45814050	M14 x 110	104	153	11.000 6.000
4061408020683	45814060	M16 x 110	123	153	13.000 7.000
4061408019533	45814070	M16 x 110	140	165	16.000 8.000
4061408031221	45814080	M20 x 110	160	165	25.000 12.000
4061408072323	45814090	M20 x 110	180	165	35.000 17.000

Painted steel Anti vibration levelling foot also with top hexagonal regulation

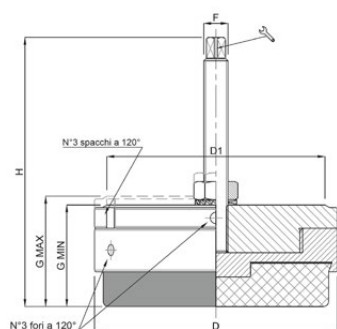

ORDER NO.	TYPE	DESIGNATION	Ø BASE PLATE	TOTAL HEIGHT	stat. Load capacity N dyn. Load capacity
4061408035373	45814000	M12 x 70	125	110	19.500 9.500
4061408035380	45814010	M16 x 70	145	133	29.000 14.000

Anti moving mounts are designed to solve the antistatic problems due to tangential acceleration, which may cause unbalance in the distribution of the weight on the machine's bearing points.

Instructions for use: put the base with the flange completely tightened under the machine bed. Tighten the threaded stem in the machine bed's hole with the top square regulation. When levelling the machine, act on the upper flange through the 3 holes or with the crevices.


Anti moving levelling foot with fine adjustment for precise levelling

MATERIALS AND CUSTOM SOLUTIONS


STEEL	STAINLESS STEEL	PLASTIC	ANTI-SLIP MATERIAL
C40 (1.1186) Steel according to ASTM standard EN ISO 898-1: 2013 (on request)	AISI 304 (1.4301) AISI 303 (1.4305) (on request) AISI 316L (1.4401) (on request)	PA6 reinforced polyamide Cold-resistant polyamide Polypropylene (PP) Polyethylene (PE)	
Coating Zinc Chrome and nickel (on request)	Vibro-polish Process for making the surface shine.	Anti-UV An anti-wear additive developed to protect polyamide PA6. Suitable for applications with high UV exposure.	NBR Shore 70/80 (FDA-certified, other Shore hardness on request). Temperature range: -25 to +110 °C (air), +80 °C (water) Colour: black
Colour Yellow: RAL1007 Other colours (on request)	High-gloss polish Very low surface roughness and excellent surface lustre.	Colours (on request)	
Cataphoresis (Black) The cataphoresis finish offers remarkable corrosion resistance.	Sandblasting Mechanical treatment with stainless steel balls for an even and homogeneous roughness pattern.		EPDM (FDA-certified) Temp.: -80 bis +150°C Colours: blue
Phosphating Phosphating improves the sliding properties, making the components smoother. It also ensures greater corrosion resistance.	Scotch-Brite-Finish A fine brushing process while maintaining a low roughness (Ra < 0.8).		Silicone compound blue 70/75 Shore (FDA-certified) Temp.: -50 to +190°C Colours: blue

ADJUSTMENT POSSIBILITY AT THE TOP OF THE SPINDLE

STANDARD



HEXAGONAL



SQUARE



INTERNAL
THREAD



INTERNAL
HEXAGON



SPINDLE TYPES

Metric coarse thread (standard)

Metric fine thread


Gas 55° Thread

American thread UNC

Whitworth thread

ADJUSTMENT POSSIBILITY AT THE BOTTOM OF THE SPINDLE

HEXAGONAL



TURNT



SQUARE




DRILLED



SPINDLE LENGTH

up to 400 mm



Would you like some advice? Just give us a call or write to us. We are happy to assist you.

T +49 7181 - 980 32 00

E info@movet.de



MOVET®
KOMPONENTEN

„TAILOR-MADE SOLUTIONS
AND COMPETENT SERVICE -
I AM IN GOOD HANDS
WITH MOVET.“

www.movet.de



Eine Marke der
HADI GmbH
Industrievertretungen
Stuttgarter Straße 11
73614 Schorndorf

Telefon: +49 7181 / 980 32 00
Fax: +49 7181 / 980 32 48
E-Mail: info@movet.de

www.movet.de

