


Piede Inox

Caratteristiche: BASE VULCANIZZATA Ø 50, STELO SNODATO 10°

Features: VULCANIZED BASE Ø 50, 10° ARTICULATED STEM

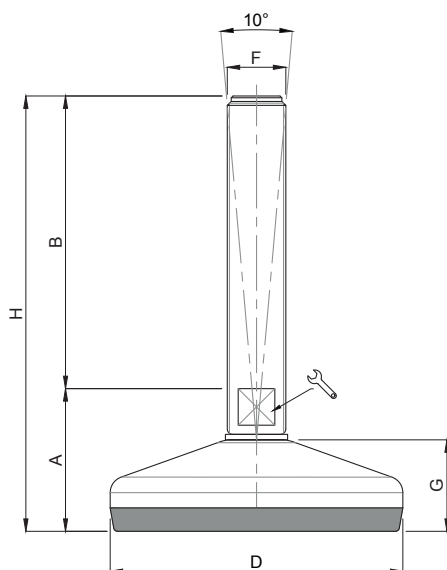

CODICE CODE	DESCRIZIONE description	DIMENSIONI PRINCIPALI - MAIN DIMENSIONS								CARICO LOAD NEWTON
		A	B	D			F	G	H	
24500/EB	M10x50	29	50	ø 50	-	14	M10	19	79	4000
24502/EB	M10x75	29	75	ø 50	-	14	M10	19	104	4000
24504/EB	M10x100	29	100	ø 50	-	14	M10	19	129	4000
24506/EB	M10x125	29	125	ø 50	-	14	M10	19	154	4000
24507/BF/EB	M10x150	32	150	ø 50	8	-	M10	19	182	4000
24508/BF/EB	M10x175	32	175	ø 50	8	-	M10	19	207	4000
24509/BF/EB	M10x200	32	200	ø 50	8	-	M10	19	232	4000
24600/EB	M12x50	29	50	ø 50	-	14	M12	19	79	4000
24602/EB	M12x75	29	75	ø 50	-	14	M12	19	104	4000
24604/EB	M12x100	29	100	ø 50	-	14	M12	19	129	4000
24606/EB	M12x125	29	125	ø 50	-	14	M12	19	154	4000
24607/BF/EB	M12x150	32	150	ø 50	10	-	M12	19	182	4000
24608/BF/EB	M12x175	32	175	ø 50	10	-	M12	19	207	4000
24609/BF/EB	M12x200	32	200	ø 50	10	-	M12	19	232	4000
24700/EB	M14x75	29	75	ø 50	-	14	M14	19	104	4000
24702/EB	M14x100	29	100	ø 50	-	14	M14	19	129	4000
24704/EB	M14x125	29	125	ø 50	-	14	M14	19	154	4000
24706/EB	M14x150	29	150	ø 50	-	14	M14	19	179	4000
24708/EB	M14x175	29	175	ø 50	-	14	M14	19	204	4000
24800/EB	M16x75	32	75	ø 50	13	-	M16	19	107	4000
24802/EB	M16x100	32	100	ø 50	13	-	M16	19	132	4000
24804/EB	M16x125	32	125	ø 50	13	-	M16	19	157	4000
24806/EB	M16x150	32	150	ø 50	13	-	M16	19	182	4000
24808/EB	M16x175	32	175	ø 50	13	-	M16	19	207	4000
24810/EB	M16x200	32	200	ø 50	13	-	M16	19	232	4000