


Piede Inox

Caratteristiche: BASE VULCANIZZATA Ø 80 CON FISSAGGIO,
STELO SNODATO 10°

Features: VULCANIZED BOLT/DOWN BASE Ø 80, 10° ARTICULATED STEM

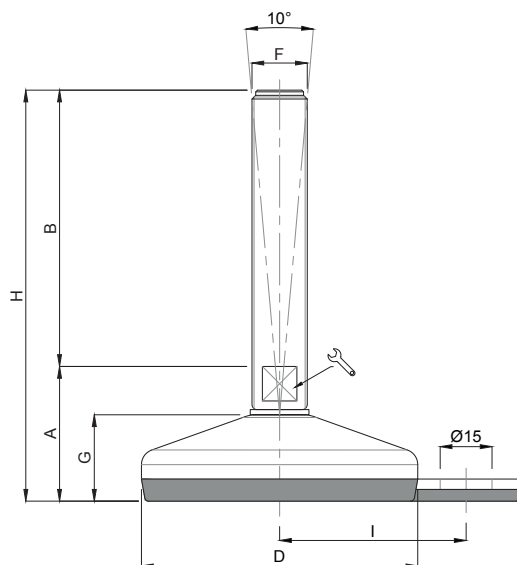

CODICE CODE	DESCRIZIONE description	DIMENSIONI PRINCIPALI - MAIN DIMENSIONS									CARICO LOAD NEWTON
		A	B	D			F	G	H	I	
24900/10/F	M10x50	35	50	ø 80	-	14	M10	25	85	54	10000
25000/10/F	M10x75	35	75	ø 80	-	14	M10	25	110	54	10000
25002/10/F	M10x100	35	100	ø 80	-	14	M10	25	135	54	10000
25004/10/F	M10x125	35	125	ø 80	-	14	M10	25	160	54	10000
25006/10/BF/F	M10x150	38	150	ø 80	8	-	M10	25	188	54	10000
25008/10/BF/F	M10x175	38	175	ø 80	8	-	M10	25	213	54	10000
25010/10/BF/F	M10x200	38	200	ø 80	8	-	M10	25	238	54	10000
24900/12/F	M12x50	35	50	ø 80	-	14	M12	25	85	54	10000
25000/12/F	M12x75	35	75	ø 80	-	14	M12	25	110	54	10000
25002/12/F	M12x100	35	100	ø 80	-	14	M12	25	135	54	10000
25004/12/F	M12x125	35	125	ø 80	-	14	M12	25	160	54	10000
25006/12/BF/F	M12x150	38	150	ø 80	10	-	M12	25	188	54	10000
25008/12/BF/F	M12x175	38	175	ø 80	10	-	M12	25	213	54	10000
25010/12/BF/F	M12x200	38	200	ø 80	10	-	M12	25	238	54	10000
25000/F	M14x75	35	75	ø 80	-	14	M14	25	110	54	10000
25002/F	M14x100	35	100	ø 80	-	14	M14	25	135	54	10000
25004/F	M14x125	35	125	ø 80	-	14	M14	25	160	54	10000
25006/F	M14x150	35	150	ø 80	-	14	M14	25	185	54	10000
25008/F	M14x175	35	175	ø 80	-	14	M14	25	210	54	10000
25020/F	M16x75	35	75	ø 80	13	-	M16	25	110	54	10000
25022/F	M16x100	38	100	ø 80	13	-	M16	25	138	54	10000
25024/F	M16x125	38	125	ø 80	13	-	M16	25	163	54	10000
25026/F	M16x150	38	150	ø 80	13	-	M16	25	188	54	10000
25028/F	M16x175	38	175	ø 80	13	-	M16	25	213	54	10000
25030/F	M16x200	38	200	ø 80	13	-	M16	25	238	54	10000
25040/F	M20x75	38	75	ø 80	17	-	M20	25	113	54	10000
25042/F	M20x100	38	100	ø 80	17	-	M20	25	138	54	10000
25044/F	M20x125	38	125	ø 80	17	-	M20	25	163	54	10000
25046/F	M20x150	38	150	ø 80	17	-	M20	25	188	54	10000
25048/F	M20x175	38	175	ø 80	17	-	M20	25	213	54	10000
25050/F	M20x200	38	200	ø 80	17	-	M20	25	238	54	10000
25052/F	M20x225	38	225	ø 80	17	-	M20	25	263	54	10000
25054/F	M20x250	38	250	ø 80	17	-	M20	25	288	54	10000
25070/F	M24x75	40	75	ø 80	20	-	M24	25	115	54	10000
25072/F	M24x100	40	100	ø 80	20	-	M24	25	140	54	10000
25074/F	M24x125	40	125	ø 80	20	-	M24	25	165	54	10000
* 25076/F	M24x150	40	150	ø 80	20	-	M24	25	190	54	10000
* 25078/F	M24x175	40	175	ø 80	20	-	M24	25	215	54	10000
25080/F	M24x200	40	200	ø 80	20	-	M24	25	240	54	10000
25082/F	M24x225	40	225	ø 80	20	-	M24	25	265	54	10000
25084/F	M24x250	40	250	ø 80	20	-	M24	25	290	54	10000

* Disponibile con Filettatura a passo fine. Aggiungere "/P2" al codice Available with Thin pitch thread. Please, add "/P2" to the code.

Sie haben Fragen? Kontaktieren Sie uns:
Do you need support? Contact us:

+49 (0) 7181 980 32 00

info@movet.eu

www.movet.eu