


Piede Inox

Caratteristiche: BASE VULCANIZZATA Ø 100 CON FISSAGGIO, STELO SNODATO 10°

Features: VULCANIZED BOLT/DOWN BASE Ø 100, 10° ARTICULATED STEM

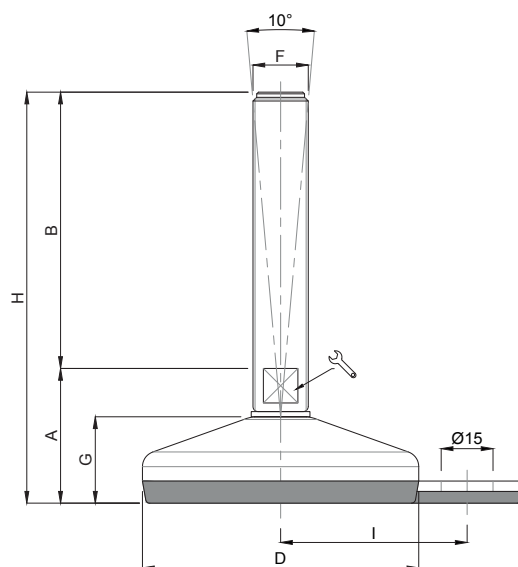

CODICE CODE	DESCRIZIONE description	DIMENSIONI PRINCIPALI - MAIN DIMENSIONS									CARICO LOAD NEWTON
		A	B	D			F	G	H	I	
25100/F/EB	M16x75	42	75	Ø 100	13	-	M16	28	117	69	15000
25102/F/EB	M16x100	42	100	Ø 100	13	-	M16	28	142	69	15000
25104/F/EB	M16x125	42	125	Ø 100	13	-	M16	28	167	69	15000
25106/F/EB	M16x150	42	150	Ø 100	13	-	M16	28	192	69	15000
25108/F/EB	M16x175	42	175	Ø 100	13	-	M16	28	217	69	15000
25110/F/EB	M16x200	42	200	Ø 100	13	-	M16	28	242	69	15000
25120/F/EB	M20x75	42	75	Ø 100	17	-	M20	28	117	69	15000
25122/F/EB	M20x100	42	100	Ø 100	17	-	M20	28	142	69	15000
25124/F/EB	M20x125	42	125	Ø 100	17	-	M20	28	167	69	15000
25126/F/EB	M20x150	42	150	Ø 100	17	-	M20	28	192	69	15000
25128/F/EB	M20x175	42	175	Ø 100	17	-	M20	28	217	69	15000
25130/F/EB	M20x200	42	200	Ø 100	17	-	M20	28	242	69	15000
25132/F/EB	M20x225	42	225	Ø 100	17	-	M20	28	267	69	15000
25134/F/EB	M20x250	42	250	Ø 100	17	-	M20	28	292	69	15000
25150/F/EB	M24x100	44	100	Ø 100	20	-	M24	28	144	69	15000
25152/F/EB	M24x125	44	125	Ø 100	20	-	M24	28	169	69	15000
* 25154/F/EB	M24x150	44	150	Ø 100	20	-	M24	28	194	69	15000
25156/F/EB	M24x175	44	175	Ø 100	20	-	M24	28	219	69	15000
* 25158/F/EB	M24x200	44	200	Ø 100	20	-	M24	28	244	69	15000
25160/F/EB	M24x225	44	225	Ø 100	20	-	M24	28	269	69	15000
25162/F/EB	M24x250	44	250	Ø 100	20	-	M24	28	294	69	15000
25180/F/EB	M30x100	44	100	Ø 100	-	26	M30	28	144	69	15000
25182/F/EB	M30x125	44	125	Ø 100	-	26	M30	28	169	69	15000
* 25184/F/EB	M30x150	44	150	Ø 100	-	26	M30	28	194	69	15000
25186/F/EB	M30x175	44	175	Ø 100	-	26	M30	28	219	69	15000
* 25188/F/EB	M30x200	44	200	Ø 100	-	26	M30	28	244	69	15000
25200/F/EB	M30x225	44	225	Ø 100	-	26	M30	28	269	69	15000
25202/F/EB	M30x250	44	250	Ø 100	-	26	M30	28	294	69	15000

* Disponibile con Filettatura a passo fine. Aggiungere "/P2" al codice
Available with Thin pitch thread. Please, add "/P2" to the code.