


Piede Inox

Caratteristiche: BASE VULCANIZZATA Ø 150 STELO SNODATO 10°

Features: VULCANIZED BASE Ø 150, 10° ARTICULATED STEM

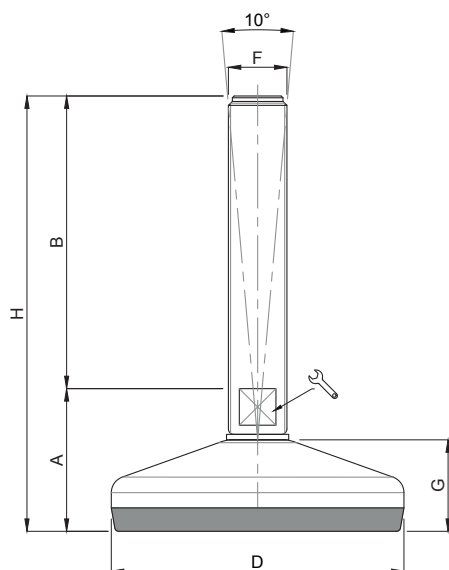

CODICE CODE	DESCRIZIONE description	DIMENSIONI PRINCIPALI - MAIN DIMENSIONS								CARICO LOAD NEWTON
		A	B	D			F	G	H	
25306	M16x75	49	75	ø 150	13	-	M16	35	124	30000
25308	M16x100	49	100	ø 150	13	-	M16	35	149	30000
25310	M16x125	49	125	ø 150	13	-	M16	35	174	30000
25312	M16x150	49	150	ø 150	13	-	M16	35	199	30000
25314	M16x175	49	175	ø 150	13	-	M16	35	224	30000
25316	M16x200	49	200	ø 150	13	-	M16	35	249	30000
25318	M20x75	48	75	ø 150	17	-	M20	35	123	30000
25320	M20x100	48	100	ø 150	17	-	M20	35	148	30000
25322	M20x125	48	125	ø 150	17	-	M20	35	173	30000
25324	M20x150	48	150	ø 150	17	-	M20	35	198	30000
25326	M20x175	48	175	ø 150	17	-	M20	35	223	30000
25328	M20x200	48	200	ø 150	17	-	M20	35	248	30000
25330	M20x225	48	225	ø 150	17	-	M20	35	273	30000
25332	M20x250	48	250	ø 150	17	-	M20	35	298	30000
25334	M24x100	49	100	ø 150	20	-	M24	35	149	40000
25336	M24x125	49	125	ø 150	20	-	M24	35	174	40000
* 25338	M24x150	49	150	ø 150	20	-	M24	35	199	40000
* 25340	M24x175	49	175	ø 150	20	-	M24	35	224	40000
* 25342	M24x200	49	200	ø 150	20	-	M24	35	249	40000
25344	M24x225	49	225	ø 150	20	-	M24	35	274	40000
25346	M24x250	49	250	ø 150	20	-	M24	35	299	40000
25348	M30x100	50	100	ø 150	-	26	M30	35	150	40000
25350	M30x125	50	125	ø 150	-	26	M30	35	175	40000
* 25352	M30x150	50	150	ø 150	-	26	M30	35	200	40000
25354	M30x175	50	175	ø 150	-	26	M30	35	225	40000
* 25356	M30x200	50	200	ø 150	-	26	M30	35	250	40000
25358	M30x225	50	225	ø 150	-	26	M30	35	275	40000
25360	M30x250	50	250	ø 150	-	26	M30	35	300	40000
25362	M36x150	50	150	ø 150	-	32	M36	35	200	40000
25364	M36x200	50	200	ø 150	-	32	M36	35	250	40000
25366	M36x250	50	250	ø 150	-	32	M36	35	300	40000

* Disponibile con Filettatura a passo fine. Aggiungere "/P2" al codice
Available with Thin pitch thread. Please, add "/P2" to the code.