


## Piede Inox 3A

## TEKNO-HYGIENIC

**Caratteristiche: BASE VULCANIZZATA DAL PIENO Ø 60/80/100**

**Features: SOLID VULCANIZED BASE Ø 60/80/100**

**Martin**  
Levelling Components

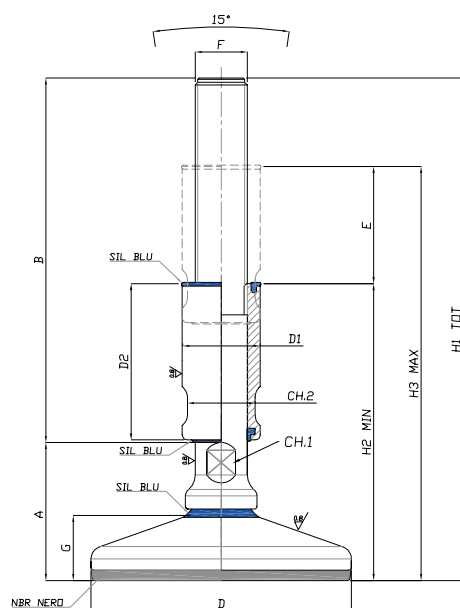

| CODICE<br>CODE | E - CORSA DI<br>REGOLAZIONE<br>REGULATION STROKE | DIMENSIONI PRINCIPALI - MAIN DIMENSIONS |     |       |     |    |    |    |    |     |     |     |     | CARICO STATICO<br>STATIC LOAD<br>NEWTON |
|----------------|--------------------------------------------------|-----------------------------------------|-----|-------|-----|----|----|----|----|-----|-----|-----|-----|-----------------------------------------|
|                |                                                  | F                                       | B   | D     | CH1 | G  | A  | D1 | D2 | CH2 | H2  | H3  | H1  |                                         |
| 27321/3A       | 45                                               | M12                                     | 140 | Ø 60  | 13  | 20 | 48 | 24 | 60 | 20  | 109 | 154 | 188 | 25000                                   |
| 27323/3A       | 70                                               | M12                                     | 190 | Ø 60  | 13  | 20 | 48 | 24 | 85 | 20  | 134 | 204 | 238 | 25000                                   |
| 27325/3A       | 45                                               | M16                                     | 140 | Ø 60  | 13  | 20 | 48 | 24 | 60 | 20  | 109 | 154 | 188 | 40000                                   |
| 27327/3A       | 70                                               | M16                                     | 190 | Ø 60  | 13  | 20 | 48 | 24 | 85 | 20  | 134 | 204 | 238 | 40000                                   |
| 27329/3A       | 45                                               | M20                                     | 140 | Ø 60  | 17  | 20 | 48 | 30 | 60 | 24  | 109 | 154 | 188 | 45000                                   |
| 27331/3A       | 70                                               | M20                                     | 190 | Ø 60  | 17  | 20 | 48 | 30 | 85 | 24  | 134 | 204 | 238 | 45000                                   |
| 27341/3A       | 45                                               | M16                                     | 140 | Ø 80  | 13  | 22 | 50 | 24 | 60 | 20  | 111 | 156 | 190 | 40000                                   |
| 27343/3A       | 70                                               | M16                                     | 190 | Ø 80  | 13  | 22 | 50 | 24 | 85 | 20  | 136 | 206 | 240 | 40000                                   |
| 27345/3A       | 45                                               | M20                                     | 140 | Ø 80  | 17  | 22 | 50 | 30 | 60 | 26  | 111 | 156 | 190 | 45000                                   |
| 27347/3A       | 55                                               | M20                                     | 142 | Ø 80  | 17  | 22 | 50 | 30 | 70 | 26  | 120 | 175 | 192 | 45000                                   |
| 27349/3A       | 70                                               | M20                                     | 190 | Ø 80  | 17  | 22 | 50 | 30 | 85 | 26  | 136 | 206 | 240 | 45000                                   |
| 27351/3A       | 45                                               | M24                                     | 140 | Ø 80  | 20  | 22 | 50 | 35 | 60 | 30  | 111 | 156 | 190 | 50000                                   |
| 27353/3A       | 70                                               | M24                                     | 190 | Ø 80  | 20  | 22 | 50 | 35 | 85 | 30  | 136 | 206 | 240 | 50000                                   |
| 27361/3A       | 45                                               | M16                                     | 140 | Ø 100 | 13  | 25 | 53 | 24 | 60 | 20  | 114 | 159 | 193 | 40000                                   |
| 27363/3A       | 70                                               | M16                                     | 190 | Ø 100 | 13  | 25 | 53 | 24 | 85 | 20  | 139 | 209 | 243 | 40000                                   |
| 27365/3A       | 45                                               | M20                                     | 140 | Ø 100 | 17  | 25 | 53 | 30 | 60 | 26  | 114 | 159 | 193 | 45000                                   |
| 27367/3A       | 70                                               | M20                                     | 190 | Ø 100 | 17  | 25 | 53 | 30 | 85 | 26  | 139 | 209 | 243 | 45000                                   |
| 27369/3A       | 45                                               | M24                                     | 140 | Ø 100 | 20  | 25 | 53 | 35 | 60 | 30  | 114 | 159 | 193 | 55000                                   |
| 27371/3A       | 70                                               | M24                                     | 190 | Ø 100 | 20  | 25 | 53 | 35 | 85 | 30  | 139 | 209 | 243 | 55000                                   |
| 27373/3A       | 40                                               | M30                                     | 135 | Ø 100 | 26  | 25 | 53 | 42 | 60 | 36  | 114 | 154 | 188 | 60000                                   |
| 27375/3A       | 65                                               | M30                                     | 185 | Ø 100 | 26  | 25 | 53 | 42 | 85 | 36  | 139 | 204 | 238 | 60000                                   |

- Sistema di livellamento progettato per l'industria lattiero casearia, farmaceutica e alimentare, nel rispetto delle più severe norme igieniche, realizzato in accordo con la normativa 3-A.

